

TUFT & NEEDLE

Wood Frame

ASSEMBLY INSTRUCTIONS

CARE INSTRUCTIONS

- ▶ Your bed frame does not require special waxing or oiling. For routine cleaning, follow the instructions on the care card. You may also dust at any time with a clean, dry, soft cloth.
- ▶ Moisture and heat can damage a wood finish. To prevent moisture damage, promptly wipe up any spills or any other moisture. To prevent heat damage, avoid placing your bed frame too close to heat sources such as HVAC vents and radiators.
- ▶ Avoid dragging sharp or rough objects across the surface of your wood bed frame, or it will become scratched.
- ▶ Wood may expand and contract with seasonal humidity changes. Maintaining consistent humidity levels will minimize movement in the wood and help to prevent warping.
- ▶ Over time, air and sunlight may change the color of natural wood. To prevent fading, avoid placing your bed frame in direct sunlight.
- ▶ To move the frame, we recommend that you please use two people to lift and carry the frame and place it in the desired place. Avoid pulling or dragging the frame across floors
- ▶ Weight capacity: 550 lbs

100-NIGHT TRIAL & 12-YEAR LIMITED WARRANTIES

Thank you for purchasing a new Tuft & Needle wood bed frame (hereinafter the “bed frame” or “Product”). We hold ourselves to high standards and are confident that you’ll be pleased with your purchase. However, if you are dissatisfied or if you discover a defect in your Product, simply review our 100-Night Trial Policy and Limited Warranty and, if you believe that you are entitled to take advantage of their terms, please contact us at support@tn.com.

All products are carefully inspected prior to shipment. Please carefully inspect your bed frame at the time of delivery. PLEASE NOTE: If your bed frame or any part of it arrives damaged, please notify us within three (3) days of receipt of your delivery; we will arrange for a replacement or return/refund as necessary, and you will not be responsible for any return fees or shipping charges. Please reach out to us by email at support@tn.com or by phone at 877-842-2586 to report items that are damaged upon delivery. We reserve the right to request images of such damage. All claim for damage ascertainable under initial inspection must be made within three (3) days after you receive delivery of the product; thereafter any physical damage to the bed frame that you do not report within three (3) days of delivery will invalidate the remainder of your 100-night trial. For more information about your warranty, visit tuftandneedle.com/legal/warranty.

100-NIGHT TRIAL POLICY

PLEASE NOTE: Any physical damage to the bed frame that you do not report to Tuft & Needle within three (3) days of delivery of your bed frame will void the remainder of the 100-night trial. If within the first 100 nights of sleeping on your new Tuft & Needle bed frame you’re not completely satisfied—for any reason—you may return it, if it remains in like-new condition and is undamaged, for a full refund. Damaged bed frames will not be accepted for return. If you return a product under our 100-Night Trial Policy that we originally shipped to an address in Alaska or Hawaii, we will be unable to refund the shipping fees that you paid for the original delivery. Please retain your bed frame packaging materials to use in the event you wish to take advantage of the 100-night trial.

TWO-PERSON ASSEMBLY

Our Frame, and certain individual pieces, can be quite heavy, so please ask a friend or family member to help you assemble it. Plus, having two people to hold everything in place during assembly makes it even easier than it already is! Bonus, your buddy is now there to help you move the Frame so you don’t drag or pull it across the floor (which we greatly discourage).



Keep These Instructions

Retain these assembly instructions for future use

If any hardware appears to be missing, or further assembly direction is needed, reach us at (877) 842-2586 or help@tn.com

Parts




x2 Side Rail




x1 Center support beam



x1 Footboard

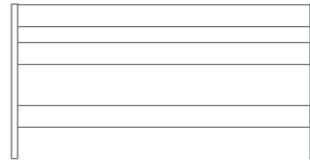

x1 Headboard

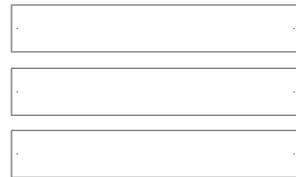

x2 Slat sets

Hardware



x4 Washer




x4 Threaded Rod



x16 Screw



x4 Nut




x1 Wrench




Phillips-Head Screwdriver
***not included**

Assembly

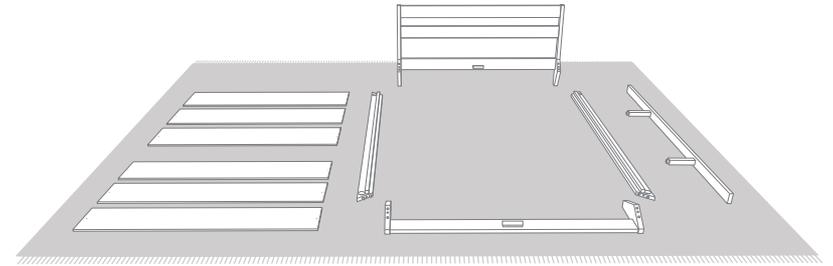


1

Arrange all frame parts on the floor. We recommend placing them on a soft rug or carpet.

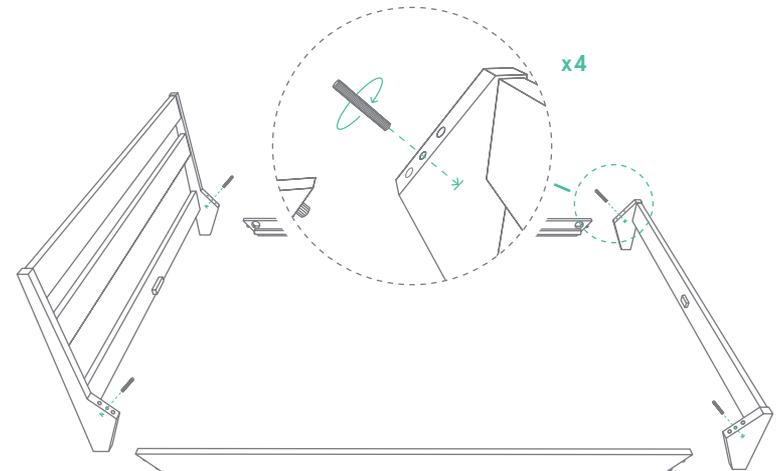


2

Insert four threaded rods into headboard and footboard. Hand-tighten all the way down until they can no longer turn.

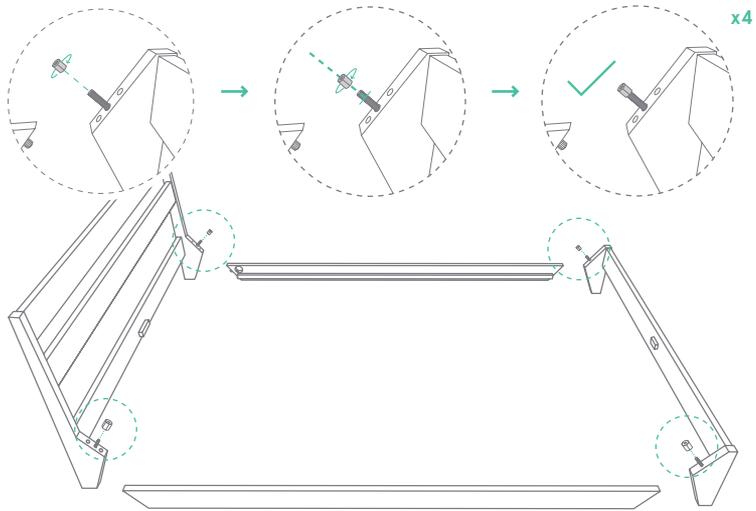


3

Begin to thread each nut on the four threaded rods, but don't thread them entirely down the rod. (This may sound counter-intuitive but it is necessary for a later step.)

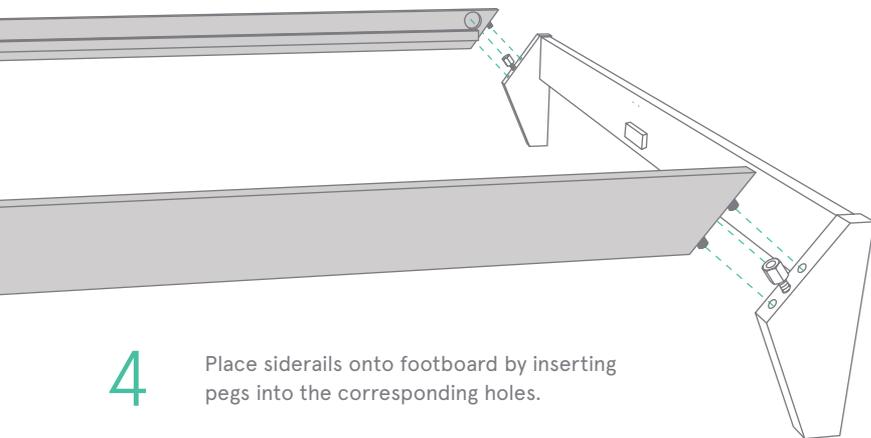


4

Place siderails onto footboard by inserting pegs into the corresponding holes.

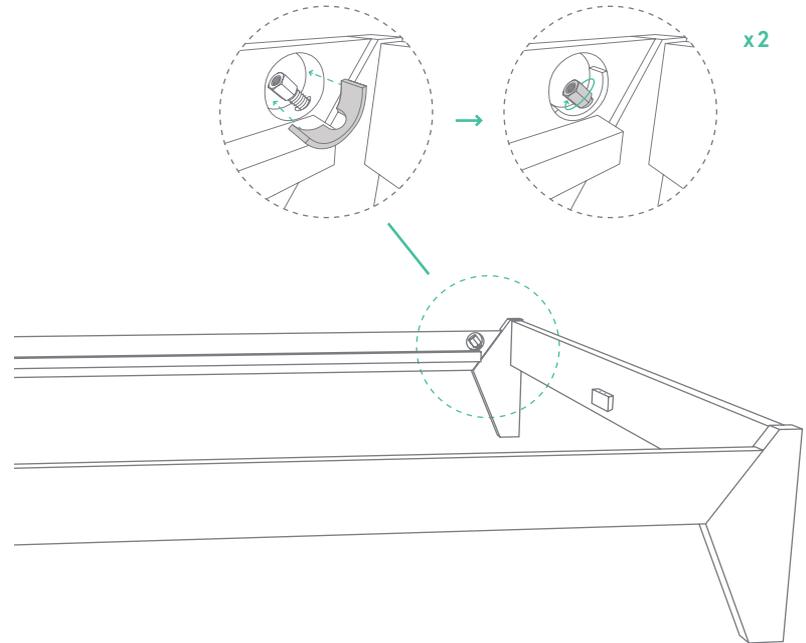


5


Insert the washer under the nut. Fully tighten with the flat wrench.

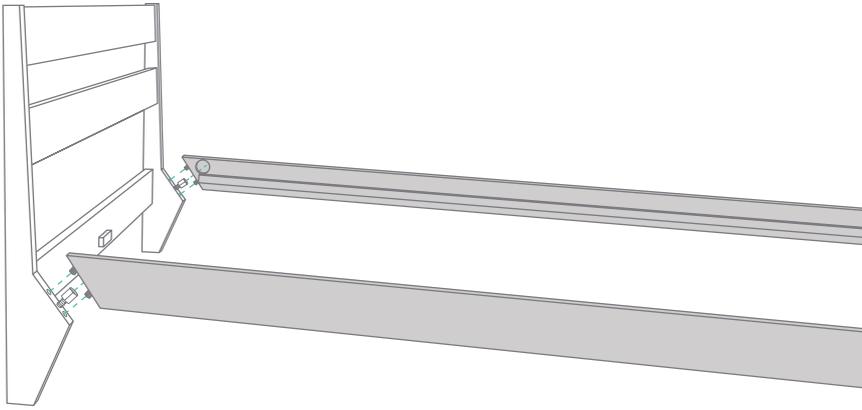


6 Place siderails onto headboard by inserting pegs in their corresponding holes.

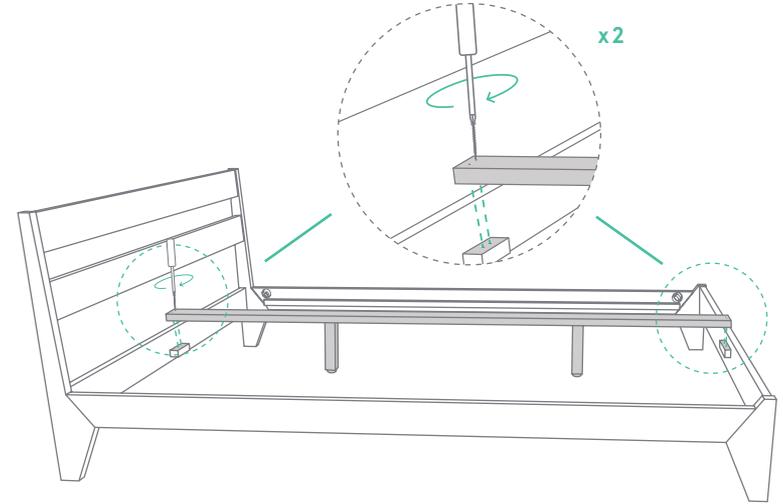


8 Using your screwdriver and two screws, screw center beam into matching holes on the cleat of the headboard. Then repeat on cleat of footboard.

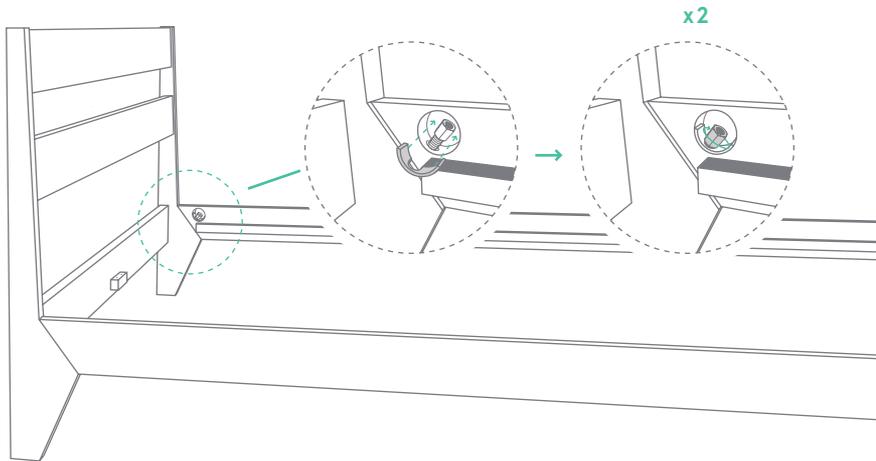


7 Insert the washer under the nut. Fully tighten with the flat wrench.

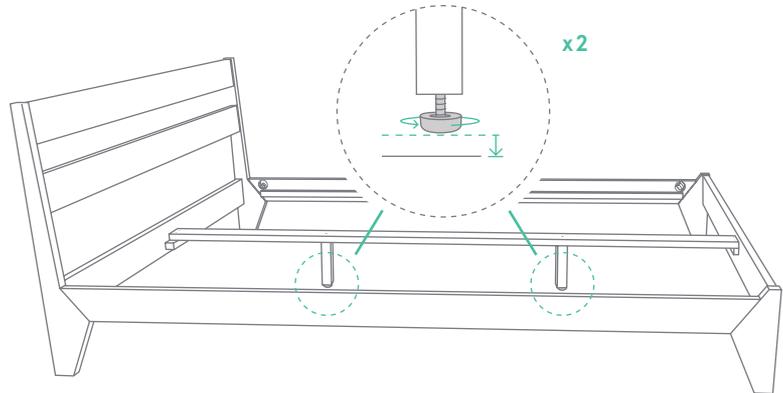


9 Adjust leveling feet as needed.

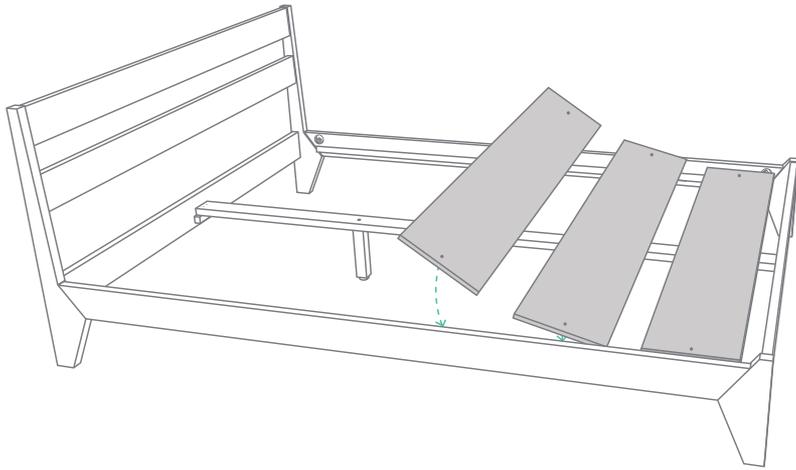

10 Lay slats horizontally on bed frame, across the center beam, aligning slat screw holes with holes on side rail cleats.

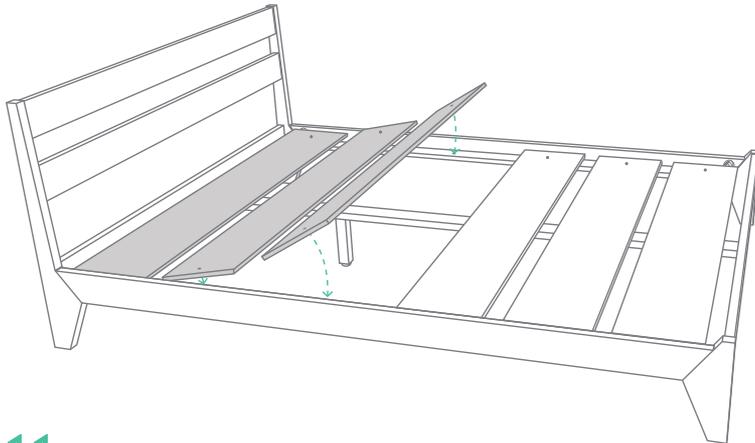

11 Repeat previous step with remaining slats.

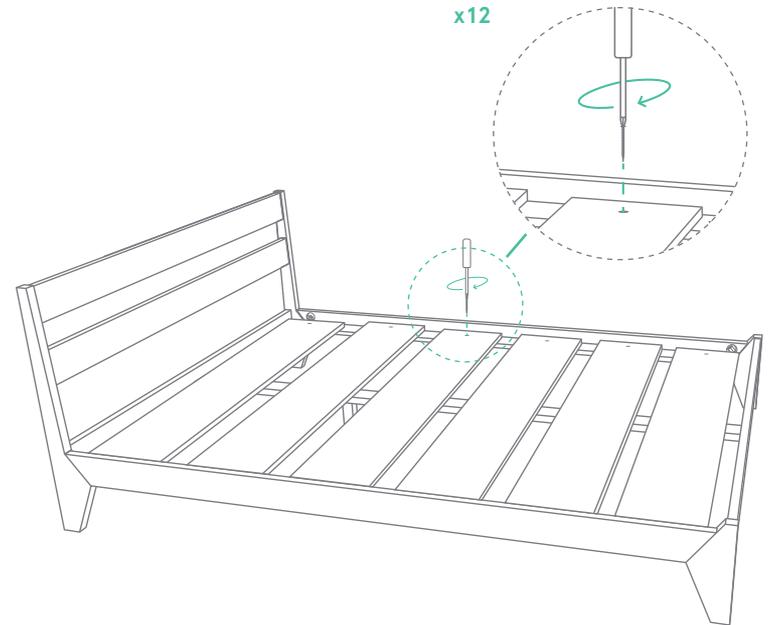

12 Using your screwdriver and remaining screws, secure each side of the slat onto the cleat on the inside of the side rail. Once all the slats are secured, you're ready for your mattress. Happy Zzzs!



Questions, Comments, Photos?

We'd love to hear from you! Email frame@tn.com or call us at (877) 842-2586